



**STANDARD®**  
**PCUplus 800**

Non-leafing Aluminiumpigmente  
mit höchster Chemikalienstabilität  
*Non-leafing Aluminum Pigments  
with Superior Chemical Resistance*

## Das Stärkste seiner Art: STANDART® PCUplus 800 The Strongest of its Kind: STANDART® PCUplus 800

Der Grund für diese beneidenswerte Widerstandsfähigkeit? Eindeutig die optimierte Beschichtungstechnologie! Denn unsere STANDART® PCUplus 800-Pigmente werden in einem Sol-Gel-Verfahren mit einer kompakten Siliziumdioxidmatrix eingekapselt und zusätzlich noch mit einer organischen Acrylatschicht umhüllt.

Auch hinsichtlich seiner Feuchtigkeits- und Witterungsbeständigkeit sowie der Benetzungseigenschaften und Abriebfestigkeit verhält sich STANDART® PCUplus 800 einfach vorbildlich. Aus diesem Grund empfehlen wir die Metallic-Pigmente insbesondere für den Fassaden- und Außenbereich sowie überall dort, wo speziell hohe Anforderungen an Stabilität bestehen.

STANDART® PCUplus 800 hat nicht nur funktionale Vorteile: Bei der Entwicklung wurde hoher Wert auf ein strukturloses und homogenes Erscheinungsbild gelegt. Dieses sorgt für die helle und seidig-glänzende Optik des Produkts.

Überzeugen Sie sich selbst und lernen Sie STANDART® PCUplus 800 näher kennen! Gerne informieren wir Sie ausführlich über alle Testergebnisse oder weitere technische Details.

STANDART® PCUplus 800 ist das feinste Pigment innerhalb dieser Produktserie. Weitere STANDART® PCUplus-Pigmente in anderen Feinheiten werden in Kürze vorgestellt.

*The reason for this enviable resilience? Clearly the optimized coating technology! Our STANDART® PCUplus 800 pigments are encapsulated with a compact silicon dioxide matrix using a sol-gel method and additionally coated with an organic acrylate layer.*

*STANDART® PCUplus 800 is also outstanding with respect to its resistance against moisture and weather as well as its wetting properties and abrasion resistance. For this reason, we especially recommend the metallic pigments for facades and exterior areas and wherever a high degree of stability is required.*

*STANDART® PCUplus 800 not only has functional advantages: We also paid special attention to a structureless and homogeneous appearance in its development. This ensures the bright and silky look of the product.*

*Convince yourself and find out more about STANDART® PCUplus 800! We will gladly inform you in detail about all test results and provide you with further technical data.*

*STANDART® PCUplus 800 is the finest pigment in this product line. We will shortly present further STANDART® PCUplus pigments in different degrees of fineness.*

## Das Stärkste seiner Art: STANDART® PCUplus 800 The Strongest of its Kind: STANDART® PCUplus 800

Stabil, stabiler, PCUplus – ihre maximale Chemikalienstabilität ist unumstritten die Charaktereigenschaft, welche unsere neuen non-leaving Pigmente für Pulverlacke weltweit so einzigartig macht.

Dies beweisen die zahlreichen Mörtel- und Chemikalentests: STANDART® PCUplus 800 hält selbst sehr aggressiven Belastungen problemlos stand. STANDART® PCUplus 800 zeigt im Vergleich keine bis kaum erkennbare Farbtönveränderungen unter hoher chemischer Belastung.

*Stable, more stable, PCUplus – their maximum resistance to chemicals is indisputably the one characteristic that makes our new non-leaving pigments for powder coatings so globally unique.*




*Numerous tests with mortars and chemicals prove it: STANDART® PCUplus 800 effortlessly withstands even very aggressive strains. In comparison, STANDART® PCUplus 800 shows no or hardly any detectable color changes under high chemical strain.*

### Stark forcierter Chemikalentest / Ultra-forced chemical resistance spot test

Wettbewerber 1 /  
Competitor 1

STANDART® PCUplus 800

Wettbewerber 2 /  
Competitor 2

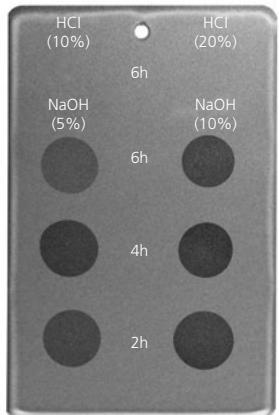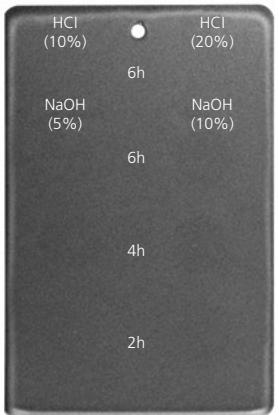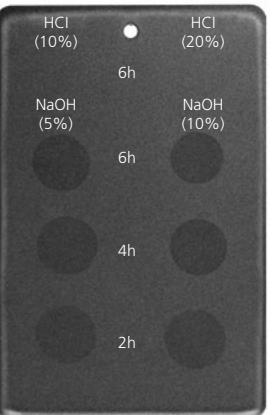



Corrosive reagents are dropped onto a powder coated test panel:  
Hydrochloride acid (HCl)  
10% and 20%  
Sodium hydroxide (NaOH)  
5% and 10%  
After a defined time (2h / 4h / 6h)  
these drops are removed from the panel under running water

### Mörteltest / Resistance to alkaline substances test

Wettbewerber 1 /  
Competitor 1

STANDART® PCUplus 800

Wettbewerber 2 /  
Competitor 2

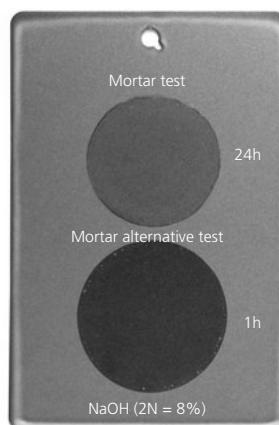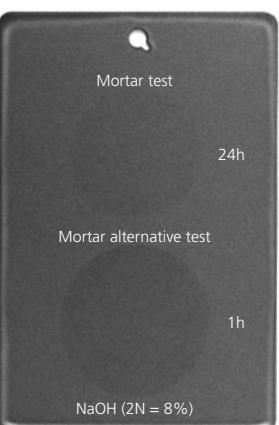

According to GSB International -  
Resistance to alkaline substances

Type	Mittlere Teilchengröße / Average particle size	Schüttichte (typischer Wert) / Bulk density (typical value)	Siebanalyse / Nasssiebung mit organischen Lösemitteln als Spülflüssigkeit
	Ermittelt mit / determined with		Screen analysis / Wet sieving with organic solvents as rinsing liquid
STANDART® PCUplus 800	Sympatec Helos		nach DIN 53196 / acc. to (min. % µm)
	D50 ca. / approx. µm	ca. / approx. kg/l	< 45

# Technische und Sicherheitsinformationen / Technical and Safety Information

Type	Particle size D50 [ $\mu\text{m}$ ] approx.	Surface Treatment	Chemical Resistance	Mortar Test	Florida Test	Humidity Test	Min. Ignition Energy	Remark
<b>Non-Leafing Aluminum Pigments</b>								
PCUplus (superior)								
PCUplus 800	8	Silica and acrylic	++++	++++	ongoing	++++	1mJ<MIE<3mJ	Silverdollar
PCU (ultra-stable)								
PCU 5000	51	Silica and acrylic	++++	++++	++++	++++	No data available*	Silverdollar
PCU 3500	36	Silica and acrylic	++++	++++	++++	++++	No data available*	Silverdollar
PCU 2000	22	Silica and acrylic	+++	++	++	++	No data available*	Cornflake
PCU 1500	17	Silica and acrylic	+++	++	++	++	No data available*	Cornflake
PCU 1000	13	Silica and acrylic	++	++	++	++	3mJ<MIE<10mJ	Cornflake

**Important: Test results can differ depending on binder system, effect pigment load and processing parameters.**

- Rating:**
- ++++ superior
  - +++ excellent
  - ++ very good
  - + good (for exterior application and whenever chemical resistance of the finished powder coat is required, a protective clear coat is necessary to protect the metallic finish from unwanted corrosion process)
  - fair (for exterior application and whenever chemical resistance of the finished powder coat is required, a protective clear coat is necessary to protect the metallic finish from unwanted corrosion process)

Explosion data of basic powder coatings and the most important effect pigments			
Solid powder (or mixture of solid powders)	Lower explosion limit g/m <sup>3</sup>	Ignition temperature °C	Minimum ignition energy mJ
Powder Coating	30	450	< 10
Aluminum pigment powder **	30	650	< 1 **
Gold bronze pigment powder	750	390	> 30
Pearlescent effect pigment powder	-	-	-



ECKART GmbH  
Guenterthal 4  
91235 Hartenstein, Germany  
Tel +49 9152 77-0  
Fax +49 9152 77-7008  
[info.eckart@altana.com](mailto:info.eckart@altana.com)  
[www.eckart.net](http://www.eckart.net)

Mit freundlicher Empfehlung  
*With compliments*

ECKART America Corporation  
830 East Erie Street  
Painesville, Ohio 44077, USA  
Tel +1 440 954-7600  
Fax +1 440 354-6224  
Toll-free: 800 556 1111  
[info.eckart.america.oh@altana.com](mailto:info.eckart.america.oh@altana.com)  
[www.eckart.net](http://www.eckart.net)

ECKART Asia Ltd.  
Room 701-3, 7th floor C C Wu Building  
302-308 Hennessy Road  
Wan Chai, Hong Kong  
Tel +852 3102 7200  
Fax +852 2882 5366  
[info.eckart.asia@altana.com](mailto:info.eckart.asia@altana.com)  
[www.eckart.net](http://www.eckart.net)

0/June2024.2 PC PDF  
024060XX0

Unsere anwendungstechnische Beratung in Wort, Schrift und durch Versuche erfolgt nach bestem Wissen, gilt jedoch nur als unverbindlicher Hinweis – besonders unter Berücksichtigung der Informationen in unseren technischen Datenblättern und Sicherheitsdatenblättern – auch in Bezug auf etwaige Schutzrechte Dritter, und befreit Sie nicht von der eigenen Prüfung der von uns gelieferten Produkte auf ihre Eignung für die beabsichtigten Verfahren und Zwecke. Anwendung, Verwendung und Verarbeitung der Produkte erfolgen außerhalb unserer Kontrollmöglichkeiten und liegen daher ausschließlich in Ihrem Verantwortungsbereich.

*This information and our technical advice – whether verbal, in writing or by way of trials – are given in good faith but without warranty, and this also applies where proprietary rights of third parties are involved. Our advice does not release you from the obligation to verify the information currently provided – especially that contained in our safety data and technical information sheets – and to test our products as to their suitability for the intended processes and uses. The application, use and processing of our products and the products manufactured by you on the basis of our technical advice are beyond our control and, therefore, entirely your own responsibility.*

A member of ALTANA